

PFT™

Plug-In Compact Fluorescent Tube Lamps



SINGLE
TUBE

DOUBLE
TUBE

TRIPLE
TUBE

Features and Benefits

- 10,000 to 12,000-hour life
- Up to 75% energy savings compared to incandescent
- 82 CRI
- Available with 2 and 4-pin starters
- Available in multiple wattages and colors
- 1-year warranty

Applications

- General lighting
- Recessed cans
- Wall sconces
- Wall packs

Litetronics PFT Line Has a Compact Fluorescent to Fit Any Need

PFT™ plug-in compact fluorescent lamps are equipped with a two or four-pin base that is specific to the lamp's wattage, and they utilize a ballast that is built into the fixture. The PFT lamps with a 2-pin starter are for use with a magnetic ballast. Those that have a four-pin starter are for use with an electronic ballast. Lamps cannot be interchanged with different ballasts.

PFT lamps have a rated life of up to 12,000 hours. Their long life helps save money on replacement, maintenance, and labor costs, and their energy efficient fluorescent technology saves up to 75% on utilities compared to incandescent lamps. PFT lamps are available in 2700K, 3500K, 4100K, and 5000K. All come with a 1-year warranty. Plug into energy savings with PFT - a long-lasting, efficient lighting choice.

LITETRONICS®

4101 West 123rd Street
Alsip, Illinois 60803
www.Litetronics.com

PFT™ Plug-In Compact Fluorescent Tube Lamps




SINGLE TUBE



DOUBLE TUBE



TRIPLE TUBE

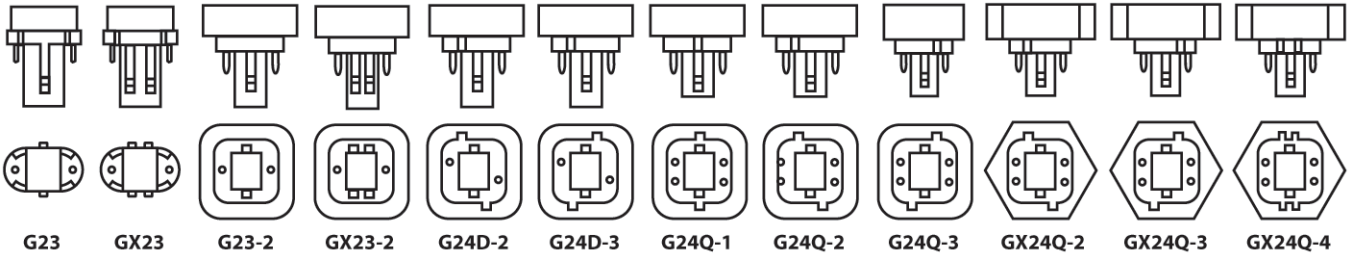

LAMP	WATTS	BASE	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	MEAN LUMENS	M.O.L.**	M.O.D.***
SINGLE TUBE	5 \$	G23	5W T4 S 2P	L-12001	50	10,000	82	2700	230	200	4.25"	1.28"
	7 \$	G23	7W T4 S 2P	L-12051	50	10,000	82	2700	400	350	5.24"	1.28"
	9 \$	G23	9W T4 S 2P	L-12101	50	10,000	82	2700	580	500	6.42"	1.28"
	13 \$	GX23	13W T4 S 2P	L-12151	50	10,000	82	2700	825	700	6.97"	1.28"
DOUBLE TUBE	9 \$	G23-2	9W T4 D 2P	L-12110	50	12,000	82	2700	525	450	4.33"	1.38"
	13 \$	GX23-2	13W T4 D 2P	L-12161	50	12,000	82	2700	900	775	4.61"	1.38"
	13 \$	G24Q-1	13W T4 D 4P	L-12165	50	12,000	82	2700	900	775	5.00"	1.38"
	18 \$	G24D-2	18W T4 D 2P	L-12210	50	12,000	82	2700	1,200	1,025	5.91"	1.38"
	18 \$	G24Q-2	18W T4 D 4P	L-12215	50	12,000	82	2700	1,200	1,025	5.63"	1.38"
	26 \$	G24D-3	26W T4 D 2P	L-12261	50	12,000	82	2700	1,800	1,525	6.70"	1.38"
26 \$	G24Q-3	26W T4 D 4P	L-12265	50	12,000	82	2700	1,800	1,525	6.42"	1.38"	
TRIPLE TUBE	18 \$	GX24Q-2	18W T4 T 4P	L-12221	50	12,000	82	2700	1,200	1,025	4.41"	1.93"
	26 \$	GX24Q-3	26W T4 T 4P	L-12271	50	12,000	82	2700	1,800	1,525	5.00"	1.93"
	32 \$	GX24Q-3	32W T4 T 4P	L-12321	50	12,000	82	2700	2,400	2,050	5.51"	1.93"
	42 \$	GX24Q-4	42W T4 T 4P	L-12371	50	12,000	82	2700	3,200	2,725	6.42"	1.93"

SPECIFICATIONS

RELIABLE OPERATING TEMP.	5°F – 140°F
--------------------------	-------------

CONVERSION CHART

CFL	=	INCANDESCENT
5-watt	=	25-watt
7-watt	=	25-watt
9-watt	=	40-watt
13-watt	=	60-watt
18-watt	=	75-watt
26-watt	=	100-watt
32-watt	=	125-watt
42-watt	=	150-watt

\$ Energy Savings

** Maximum Overall Length (in inches)

*** Maximum Overall Diameter (in inches)

Please see the LITETRONICS CATALOG for more PFT™ products.



LITETRONICS®